



CONE CURTO
(SEM PINOS) - ASA B5.9

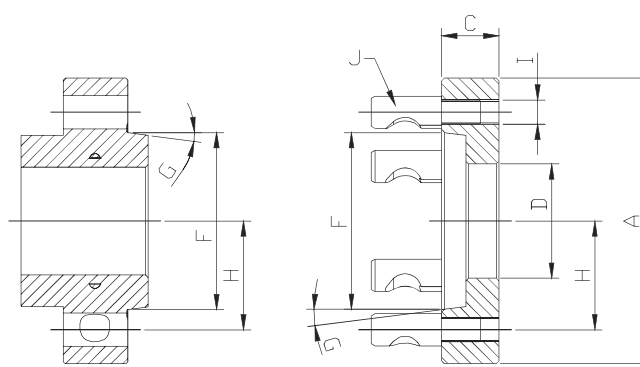

CONE CURTO
(COM PINO TIPO CAMLOCK) - CAMLOCK - ASA B5.9

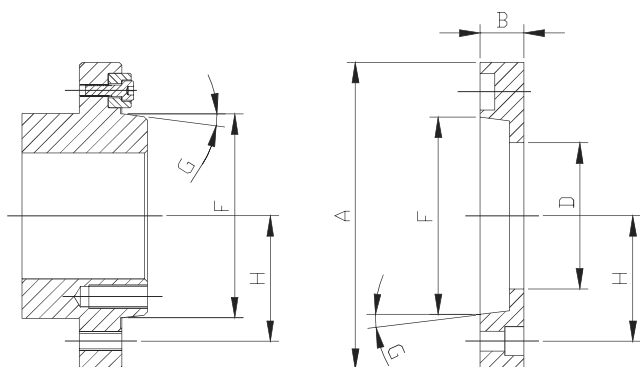


CONE	CÓDIGO	A Ø	B	D	F *	G	H	Kg
3	160-A3	160	25	50	53,975	7° 7' 30"	35,331	5,5
	205-A3	205						7,2
4	160-A4	160	25	60	63,5127	7° 7' 30"	41,275	4,3
	205-A4	205						8,6
5	205-A5	205	25	79	82,5576	7° 7' 30"	52,387	8,5
6	205-A6	205	25	80	106,3701	7° 7' 30"	66,675	7,4
	255-A6	255	30					12
	315-A6	315	35					22
	400-A6	400	36					35
8	255-A8	255	30	80	139,7139	7° 7' 30"	85,725	11,5
	315-A8	315	35					21,5
	400-A8	400	36					34
	500-A8	500	40					94,6
	650-A8	650	60					170
	750-A8	750	60					232
11	315-A11	315	35	100	196,8639	7° 7' 30"	117,475	18,5
	400-A11	400	36					33,5
	500-A11	500	50					93
	650-A11	650	60					169
15	750-A11	750	60	120	285,7627	7° 7' 30"	165,100	230
	400-A15	400	40					32
	500-A15	500	50					91,4
20	650-A15	650	60	130	412,7627	7° 7' 30"	231,775	168
	750-A15	750	60					225,6
	650-A20	650	60					167
	750-A20	750	60					224,6

CONE	CÓDIGO	A Ø	C	D	F	G	H	I	J *	Kg
3	160-D3	160	36	40	53,975	7° 7' 30"	35,331	7/16 x 20	3	6
	205-D3	205								6,7
4	160-D4	160	36	40	63,5127	7° 7' 30"	41,275	7/16 x 20	3	5,8
	205-D4	205								7
5	205-D5	205	36	50	82,5576	7° 7' 30"	52,387	1/2 x 20	6	7,4
6	205-D6	205	36	80	106,3701	7° 7' 30"	66,675	5/8 x 18	6	8,5
	255-D6	255	40							12,6
	315-D6	315	45							23,5
	400-D6	400	50							35
8	255-D8	255	40	80	139,7139	7° 7' 30"	85,725	3/4 x 16	6	12,9
	315-D8	315	45							24
	400-D8	400	50							37,2
	500-D8	500	50							87
11	315-D11	315	45	100	196,8639	7° 7' 30"	117,475	7/8 x 14	6	20,6
	400-D11	400	50							41
15	500-D11	500	50	120	285,7627	7° 7' 30"	165,1	1" x 14	6	92
	400-D15	400	50							42,1
	500-D15	500	50							91
	650-D15	650	60							167
	750-D15	750	60							229

CONE	Ømm MAIOR DO CONE	Ømm DO PINO	QTDE DE PINOS
3	53,975	14,3	3
4	63,5127	15,8	3
5	82,5576	19,05	6
6	106,3701	22,2	6
8	139,7139	25,4	6
11	196,8639	30,2	6
15	285,7627	34,9	6

CONE LONGO
(SEM PINOS) - ASA B5.9

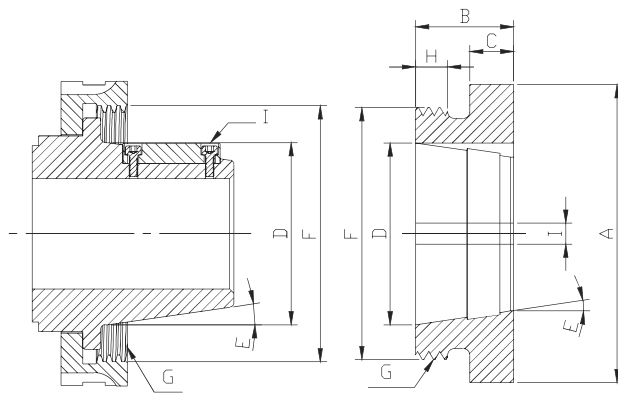

CONE	CÓDIGO	AØ	B	C	D	E	F*	G	H	I	Kg
L 00	160-L00	160		22							3,5
	205-L00	205	54	25	69,85	8°17'50"	95,12	6F.P.P.	14	9,57	6,4
L 0	160-L0	160		22							3,7
	205-L0	205		25							6,8
	255-L0	255	63,5	28	82,55	8°17'50"	114,17	6F.P.P.	14	9,57	10,6
	315-L0	315		32							18,3
	400-L0	400		36							32
L 1	255-L1	255		28							12
	315-L1	315	76,2	32	104,77	8°17'50"	152,27	6F.P.P.	16	15,92	19
	400-L1	400		36							33
	500-L1	500		40							69

L 1 ESPECIAL	255-L1E	255		28							10,5
	315-L1E	315	76,2	32	101	8°17'50"	127	6F.P.P.	16	15,92	20
	400-L1E	400		36							32

* Ø Sobre a rosca | Kg aproximado